

Plug-in Power Supply Card

120 V ac or 130 V dc to -24 V dc, 751313

Description and Installation



DOCUMENT CONTROL INFORMATION

Document Part Number: 924-010048-001, Rev 4
Document Issue Number: 4
Publication Date: January 09, 2003
Document ID: (o02i7000.fm)

CONFIDENTIALITY NOTICE

The information contained in this document is the property of Positron Inc. Except as specifically authorized in writing by Positron Inc., the holder of this document: 1) shall keep all information contained herein confidential and shall protect same in whole or in part from the disclosure and dissemination to all third parties, and 2) shall use same for operating and maintenance purposes only.

DISCLAIMER NOTICE

Although Positron Inc. has made every effort to ensure the accuracy of the information contained herein, this document is subject to change without notice.

TECHNICAL CUSTOMER SUPPORT

Should a problem arise, contact your customer support department. If the problem cannot be resolved by your support department or if you have any questions, contact Positron's Technical Customer Support department at 1-888-577-5254.

© 2003 Positron Inc.

Teleline Isolator is a registered trademark of Positron Inc.

Product names, other than Positron's, mentioned herein may be trademarks and/or registered trademarks of their respective companies.

1.	The Plug-in Power Supply Card	1
2.	Hardware Description	3
3.	Technical Specifications	6
4.	Installation	8
5.	Service and Support	10

1. The Plug-in Power Supply Card

The Plug-in Power Supply Card, model 751313, provides 120 ac or 130 dc to -24 V dc power to the Five-card Shelf, model 751112, or the Eight-card Shelf, model 751109. It also offers the possibility of recharging the Plug-in Battery Backup Card, model 751312.

If the Plug-in Battery Backup Card is not used, then two Plug-in Power Supply Cards may be installed in the Five or Eight-card Teleline shelf for redundancy. Each card is capable of providing the power required by a fully loaded shelf. When two cards are available, the load is shared by the two cards. If one of them fails, the other one takes over the full load without interruption of power.

Note


With the two-card configuration, 2 to 5% more power is dissipated due to the reduced efficiency of the Power Supply Cards at lower loads. However, two cards will deliver more power to the load (27 V instead of 25 or 26 V).

Its features include the following:

- The card can operate from 120 V ac or 130 V dc.
- The card is thermally protected. In case of overloading, the card will stop when too high a temperature is reached and will restart once it cools off.
- The card allows for redundancy if two are connected in the shelf. If one card fails, the other takes over the full load.
- The card can be used in conjunction with the Plug-in Battery Backup card, model 751312, to provide an uninterruptible power supply when working from 120 V ac.
- A “Power In” LED and a “Power Out” LED allow easy assessment of power supply functionality.

For a view of the Plug-in Power Supply Card, refer to Figure 1.


Figure 1 Model 751313 Component Layout

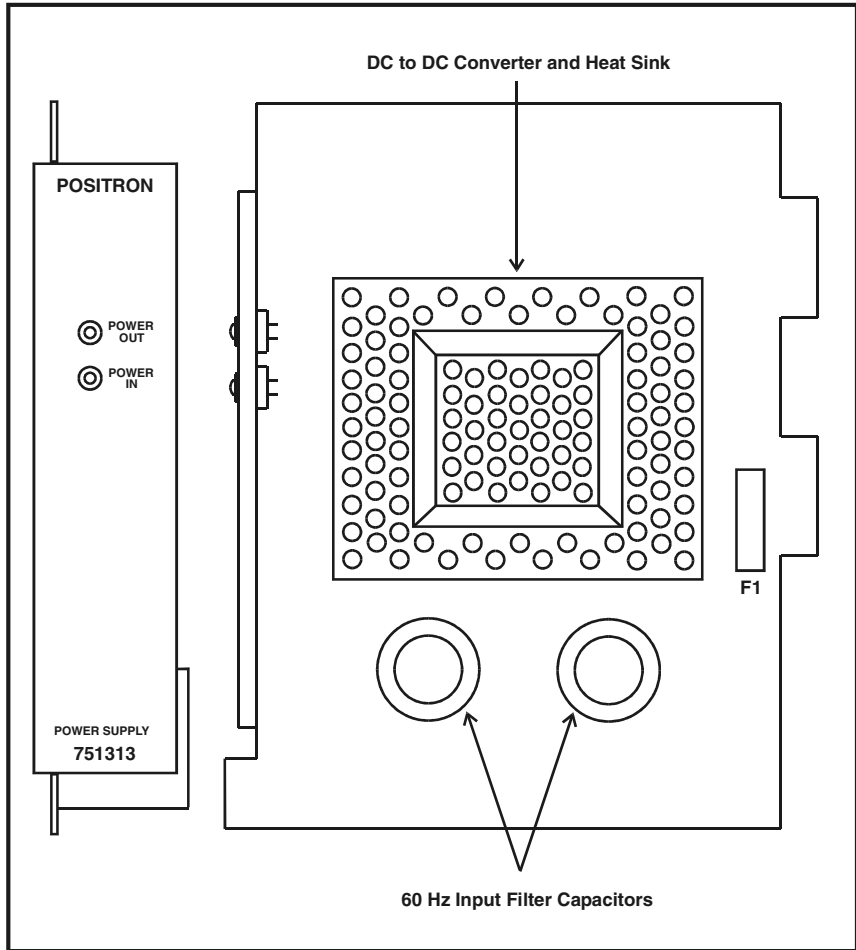

2. Hardware Description

For the card's block diagram, refer to Figure 2.

Figure 2 Block Diagram

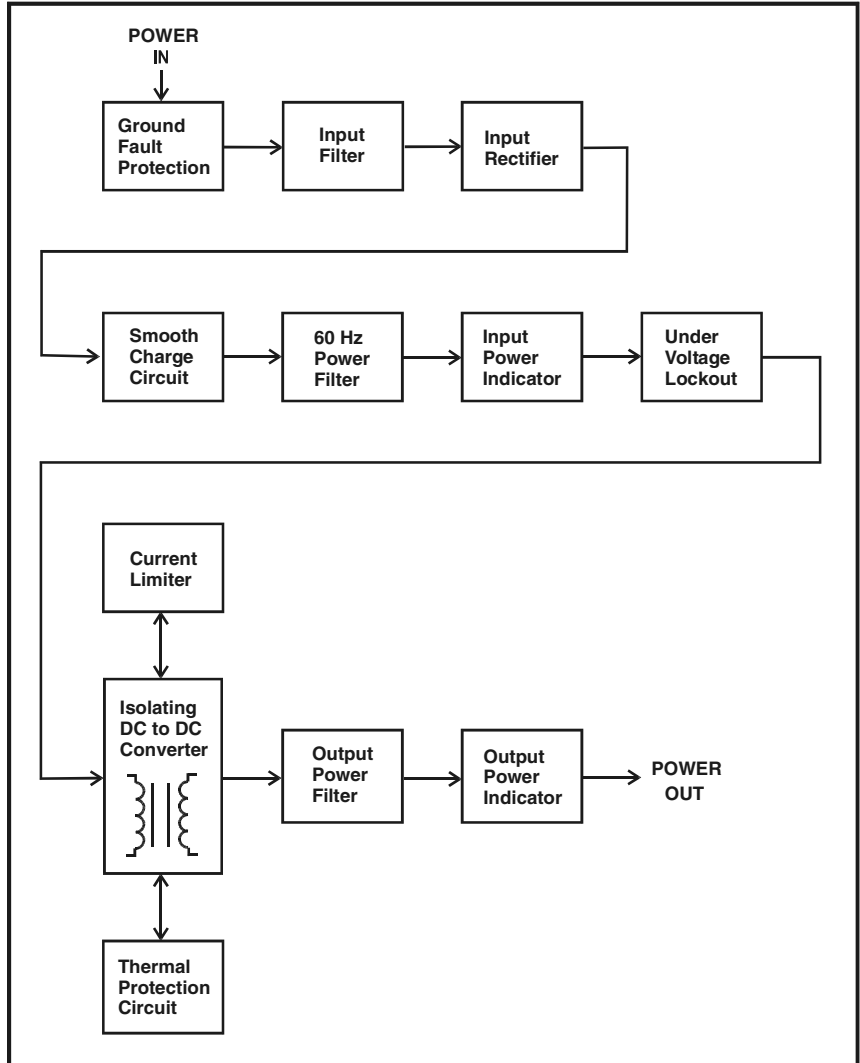

The following is a description of the elements of the Plug-in Power Supply Card block diagram.

Power Input

The Power Input requirement for the Power Supply Card is 105 to 135 V ac rms (60 Hz) or 100 to 190 V dc, at 1 amp rms.

Ground Fault Protection

The Ground Fault Protection consists of fuse F1, and is designed to protect the power supply from severe station and utility ground faults. Moreover, it protects floating input against common mode above 250 Vrms using a varistor.

Input Filter

The Input Filter smooths out the power input and prevents common mode noise from the power supply's switching circuitry from being introduced onto the power lines.

Input Rectifier

The Input Rectifier converts an AC power source to DC.

Smooth Charge Circuit

The Smooth Charge Circuit protects the DC to DC converter from the large and potentially damaging current surges arising from the charging of the 60 Hz power filter capacitors on power-up.

60 Hz Power Filter

The 60 Hz Power Filter smooths the rectified AC input.

Input Power Indicator

The Input Power Indicator (green LED) illuminates upon the presence of the minimum required input voltage of 100 V dc or 70 V ac rms.

For a view of the possible LED status indications, refer to Table 1.

Under Voltage Lockout

The Under Voltage Lockout circuit shuts off the DC to DC converter if the input voltage falls below 100 V dc or 70 V ac rms. This is intended to extend the life of the converter.

Current Limiter

The Current Limiter (actually part of the DC to DC Converter) limits the output current to 2.5 amps maximum.

Isolating DC to DC Converter

The Isolating DC to DC Converter converts a DC input of 100 to 200 V dc to -28 V dc \pm 3 V dc, and also provides insulation between input and output up to 250 V rms.

Thermal Protection Circuit

The Thermal Protection Circuit shuts down the Power Supply Card when the heat sink temperature exceeds 167°F (75°C), and reactivates it when the temperature falls to 158°F (70°C). This prevents the DC to DC Converter from overheating.

Output Power Filter

The Output Power Filter reduces to an acceptable level any switching noise from the Power Supply Card.

Output Power Indicator

The Output Power Indicator (yellow LED) illuminates at -20 V dc, indicating that output power is available.

For a view of possible LED status indications, refer to Table 1.

Power Output

The Power Output of the card is 2.5 amps at -27 V dc.

Table 1 LED Status Indications

Power In LED (Green)	Power Out LED (Yellow)	Power Supply Card Status
On	On	Both input and output power are available (normal condition).
On	Off	Input power is present but output power is not available, the output LED circuitry is not functioning, or the -24 V has been short-circuited by one of the cards in the shelf.
Off	On	Both input and output power are available, but the input LED circuitry requires servicing by Positron.
Off	Off	Input power is not present, or a Battery Backup Card, model 751312, is powering the shelf (in which case the Power Out LED on the right-hand side of the shelf should be lit).

3. Technical Specifications

For a listing of the card's electrical specifications, refer to Table 2. For a listing of the card's physical specifications, refer to Table 3.

Table 2 Electrical Specifications (measured at 77°F or 25°C, 50% R.H.)

Parameter	Specifications
Input AC voltage	105 to 135 V ac rms
Maximum floating input	250 V rms w.r.t. station ground
Input AC frequency	60 Hz
Input DC voltage	100 to 200 V dc
Output DC voltage	-28 V dc \pm 3 V dc (factory set to -27 V dc)
Maximum output current	2.5 A at -27 V dc
Maximum output power	75 W, derated at 0.344 W/°F (0.62 W/°C) above 113°F (45°C)
Power dissipation	25% of power to load, or 20% of input power
Output ripple voltage (120 Hz)	Less than 75 mV _{pp}
Switching noise	Less than 0.2 V _{pp}
Efficiency	80%
Load regulation	Better than 1%
Line regulation	Better than 0.1%
Thermal shutdown	167°F (75°C)
Soft start	2 A maximum

Table 3 Physical Specifications

Parameter	Specifications
Operating temperature range	-4°F to +149°F (-20°C to +65°C)
Height	6.375" (16.1925 cm)
Width	1.5" (3.81 cm)
Depth	8.0" (20.32 cm)
Weight	2.171 lbs (0.984 kg)

4. Installation


The Plug-in Power Supply Card plugs into its upper lefthand location on the Five or Eight-card new generation Teleline Shelf.

Caution

- Stand on a thick rubber mat and wear rubber gloves during the installation procedure. It is preferable to perform these procedures on a clear dry day when a Ground Potential Rise (GPR) or transients are less likely to occur.
 - This card utilizes CMOS circuitry that can be damaged by static electricity. Observe normal CMOS handling procedures to avoid static discharge. Manipulate the card exclusively by the faceplate to prevent any damage to the card and to limit the possibility of electric shock. When moving the card, carry it in an ESD safe container or the antistatic bag, provided with the card. Failure to follow ESD precautions may void the warranty. For further information concerning ESD precautions, contact Positron's Customer Support department.
-

1. Unpack the Plug-in Power Supply Card from its protective box and the shielded anti-static bag.
2. Confirm that the unit is a Power Supply Card by identifying the name and model number on the faceplate of the card.
3. Install the Five or Eight-card Teleline shelf power cable as per its installation instructions. Refer to the Description and Installation documentation for the Five-card Shelf, model 751112/1, part number 924-010199-001 and Eight-card Shelf, model 751109/13, part number 924-010040-001.
4. The card must be inserted rightside up and may be plugged into the shelf with the power ON or OFF.
 - ▶ Slide the card into its designated shelf slot until the two card-edge connectors lock into the Teleline shelf. For an illustration of its installation location, refer to Figure 3.

Figure 3 Model 751313 Installation Location

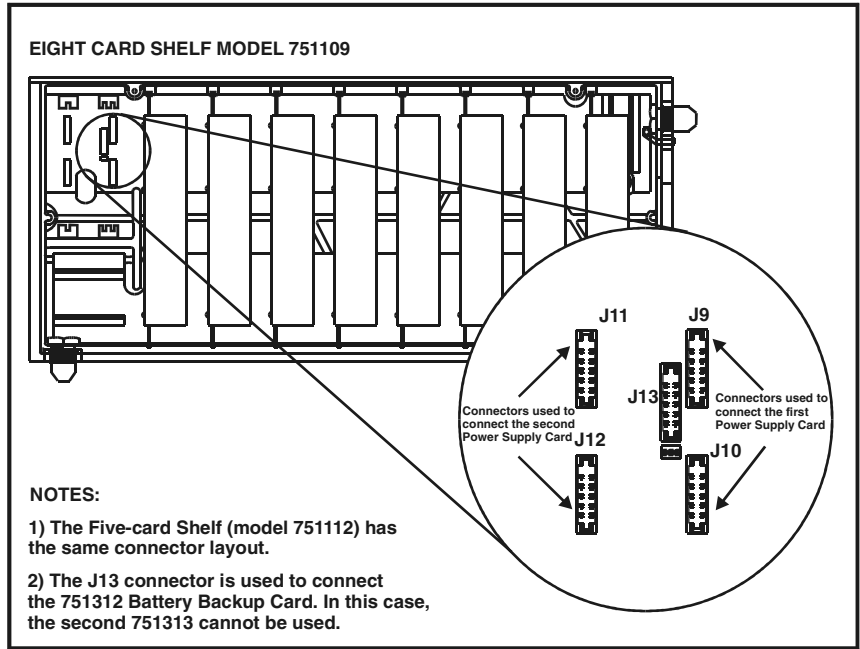

5. Choose an installation option for the Power Supply Card. For a list of options, refer to Table 4.

Table 4 Installation Options

Option	Station Side Slot Connectors
Single: one Power Supply Card	J9/J10
Redundant: two Power Supply Cards *	J9/J10 (primary card) and J11/J12 (second card)
* Only possible if the Plug-in Battery Backup Card, model 751312, is not used.	

- If the redundant option is required, repeat step 4 and install a second Power Supply Card.
6. Verify the installation by verifying that the “Power In” and the “Power Out” LEDs of the card, and the “Power Out” LED of the shelf are all lit.

5. Service and Support

Technical Customer Support

Positron is committed to providing excellent ongoing technical support to its customers. A team of specialists is always available at our Technical Support Center in Montreal for either telephone consultations or on-site visits, to assist Field Technical personnel in the maintenance and troubleshooting of Positron equipment. During normal business hours, (8:30 a.m to 5:00 p.m. EST), any one of our Technical Customer Support (TCS) staff may be reached by dialing 1-888-577-5254 from anywhere in the continental United States or from Canada. Customers outside North America should dial 1-514-345-2200. Staff may also be contacted via fax at 514-345-2271 or e-mail at powerdivision@positron.qc.ca.

Positron TCS staff are available to provide technical assistance and/or to supervise the installation of Positron equipment. Assistance in the planning, configuration, and implementation of the installation will be provided as requested. Arrangements and pricing information regarding field assistance may be obtained by contacting the Technical Customer Support department. Please contact Positron for scheduling at least four weeks prior to the actual requested visit date.

Customer Training

Positron offers full customer training courses, as requested. Seminars are also available on High Voltage Interface (HVI). For more information, contact a customer representative by dialing 1-888-577-5254 or use our e-mail address, powerdivision@positron.qc.ca.

Warranty

Positron warrants that all equipment shall perform in accordance with Positron's specifications. The warranty remains valid for five (5) years from the date of shipment. The warranty will be honored provided that the equipment has not been abused and provided that the equipment has been installed and used in accordance with Positron's installation instructions and specifications. The warranty fully covers workmanship, materials and labor.

This warranty is in lieu of all other warranties, whether expressed or implied, including warranties of merchantability and fitness for a particular purpose. Positron guarantees that all equipment shall perform in accordance with Positron's specifications. Positron disclaims any warranty that Positron

equipment will meet customer requirements beyond the product specification. Positron disclaims any warranty that operations will be uninterrupted or error free.

Repair Service

Positron Inc. offers repair services by which customers can count on timely and quality repairs, regardless of customer location.

All warranty repairs are performed at no cost. Positron reserves the right to repair or replace any equipment which has been found to be defective.

For information about out-of-warranty repairs, contact Positron's Repair department at 1-800-661-4911 (from anywhere in the continental United States or from Canada) or dial 514-345-2228. Due to the varied nature of repairs, no one time frame for turnaround can be guaranteed. However, average turnaround time is two weeks from date of receipt. In emergency situations, special arrangements can be made by contacting our Repair department. All repaired items are warranted for a period of 90 days. Bulk repairs (more than five items) will require additional processing time, therefore, please take this into consideration when requesting a Return Material Authorization (RMA) number.

Before returning any items to Positron for repair, warranty repair or replacement, call the Repair department to obtain an RMA number. Parts returned without RMA numbers cannot be accepted. The RMA number must always be clearly marked on all boxes and crates and on all shipping documents.

Items under warranty are to be shipped prepaid to Positron and will be returned prepaid to the customer. Items that are not under warranty are to be shipped prepaid to Positron and will be returned prepaid with freight charges included on the invoice. Positron cannot accept items shipped collect. A purchase order number is required for all repairs.

To accelerate the repair process, whenever possible, customers should include a report detailing the reason for return with the unit(s) being returned. Also, please include the name and phone number of a person who can be contacted should our Repair department need further information.

When packing items being returned for repair, please ensure that the item(s) is properly packed to avoid further damage. Teleline Isolator cards should never be shipped while installed in a shelf; this will cause damage and will almost invariably extend the repair period.

Ordering Information

Positron's Teleline equipment can be ordered by telephone, facsimile, or by mail. All orders should be directed to the Positron Inside Sales department. Ordering by telephone, or facsimile will eliminate any delays arising from postal services. However, a hard copy purchase order is required as a confirmation. In addition to the model numbers of the items being ordered, the following information is required:

- Company name, contact name and telephone number
- Purchase order number
- "Ship To" address
- "Bill To" address
- Date required on site

All orders must be followed by a confirming order. Equipment will not be shipped until such confirmation is received.

For a list of our contact information, refer to Table 5.

Table 5 Positron Contact Information

Address	Positron Inc.
	5101 Buchan St.
	Montreal, Quebec, Canada
	H4P 2R9
Main telephone number	514-345-2200
Customer Service department telephone number	514-345-2200, 1-888-577-5254
General e-mail address	powerdivision@positron.qc.ca
Customer Service department fax number	514-345-2271
TCS department toll-free number	1-888-577-5254
TCS department fax number	514-345-2271
TCS department e-mail address	scarbonaro@positron.qc.ca
Repair department telephone numbers	514-345-2228 or 1-800-661-4911
Customer representative e-mail address	customerservicepower@positron.qc.ca

